



自然空冷用ヒートシンク NE型


NE176-33 (S273)

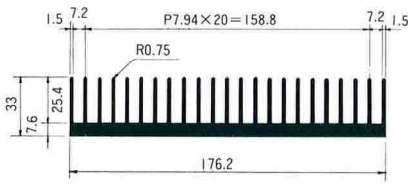


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.6	761	298.4
80	1.2	1,217	477.4
100	1.0	1,521	596.7
150	0.8	2,282	895.1
200	0.7	3,042	1,193.4




NE192-33 (S274)

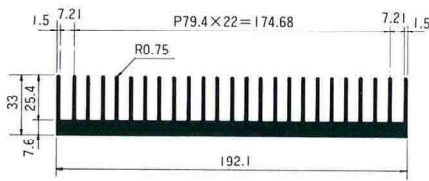


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.6	827	324.8
80	1.1	1,322	519.6
100	1.0	1,653	649.5
150	0.8	2,480	974.3
200	0.6	3,306	1,299.0




NE48-33 (S256)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.9	232	88.7
80	2.9	371	141.9
100	2.5	464	177.4
150	1.8	696	266.1
200	1.5	928	354.8




NE84-35 (S583)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.77	462	104.9
100	1.89	924	209.8
200	1.48	1,848	419.6
300		2,772	629.4
400		3,696	839.2



NE240-35 (S533)

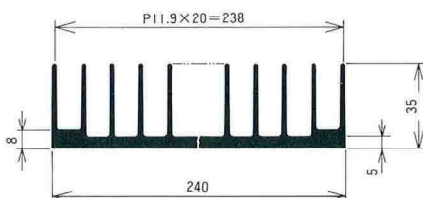


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.16	843	312.6
100	0.87	1,685	625.1
200	0.54	3,370	1,250.2
300	0.41	5,055	1,875.3
400	0.34	6,740	2,500.4

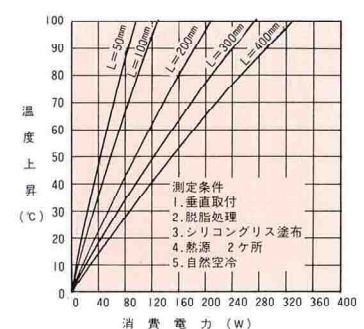


自然空冷用ヒートシンク NE型


NE53-40 (S262)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.6	280	111.8
80	2.6	448	178.9
100	2.2	560	223.6
150	1.7	840	335.4
200	1.4	1,120	447.2




NE103-40 (S347)

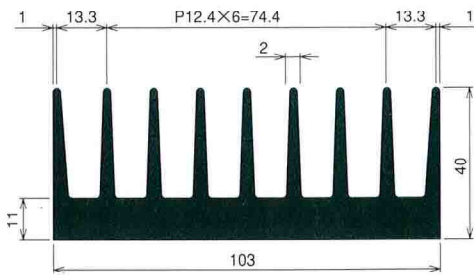


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.4	359	257.3
80	1.9	574	411.7
100	1.6	718	514.6
150		1,077	771.9
200	1.1	1,436	1,029.2




NE134-40 (S512)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	1.01	1,010	526.8
200	0.70	2,020	1,053.6
300	0.54	3,030	1,580.4
400	0.45	4,040	2,107.2




NE140-40 (S257)

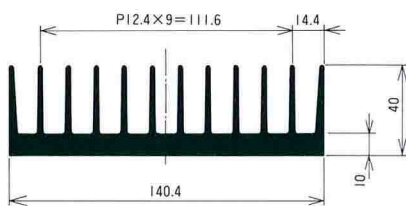


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.9	987	628.2
150	0.7	1,481	942.3
200	0.5	1,974	1,256.4
300	0.4	2,961	1,884.6
400	0.3	3,948	2,512.8




NE170-40 (S513)

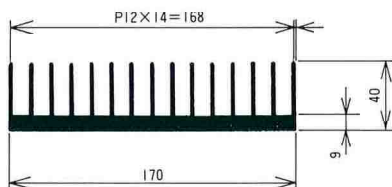


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.78	1,270	664.2
200	0.48	2,540	1,328.4
300	0.37	3,810	1,992.6
400	0.31	5,080	2,656.8




NE220-40 (S591)

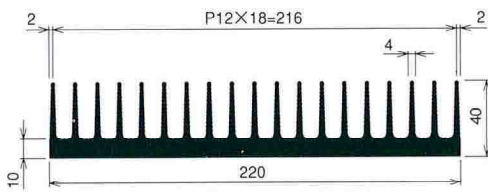


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.21	845	523.2
100	0.82	1,690	1,046.3
200		3,380	2,092.6
300		5,070	3,138.9
400		6,760	4,185.2




NE221-40 (S593)

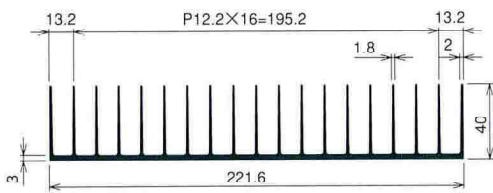


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.49	908	234.4
100	0.76	1,816	468.7
200	0.45	3,632	937.4
300	0.32	5,448	1,406.1
400		7,264	1,874.8




NE290-40 (S515)

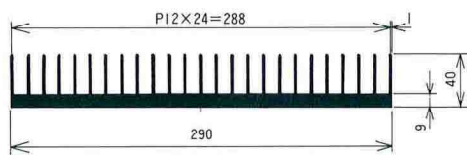


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.43	2,116	1,121.0
200	0.28	4,232	2,242.0
300	0.21	6,348	3,363.0
400	0.17	8,464	4,484.0




NE304-40 (S592)

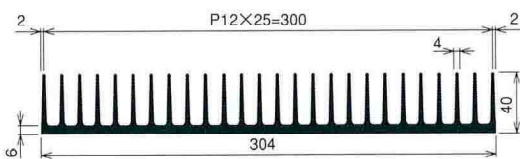


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.03	1,173	596.9
100	0.66	2,346	1,193.7
200	0.43	4,692	2,387.4
300		7,038	3,581.1
400		9,384	4,774.8




NE86-41 (S343B)

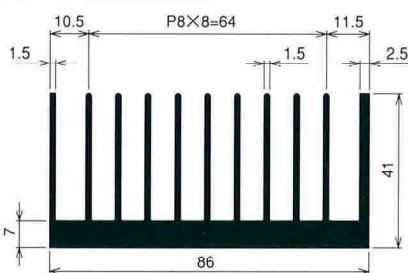


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.0	485	155.5
80	2.1	776	248.8
100	1.7	970	311.0
150		1,455	466.5
200	1.1	1,940	622.0




NE347-41 (S599)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50		1,658	709.0
100		3,315	1,418.0
200	0.44	6,630	2,836.0
300	0.36	9,945	4,254.0
400		13,260	5,672.0




NE87-45 (S584)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.39	503	113.9
100	1.64	1,005	227.8
200	1.19	2,010	455.6
300		3,015	683.4
400		4,020	911.2




NE38-49 (S320)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	5.78	199	97.2
80	4.60	318	155.5
100	3.88	398	194.4

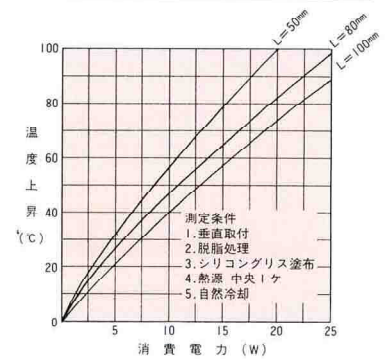


NE100-50 (S516)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	1.20	864	413.0
200	0.78	1,728	826.0
300	0.60	2,592	1,239.0
400	0.49	3,546	1,652.0



NE143-50 (S517)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.83	1,191	601.3
200	0.55	2,382	1,202.6
300	0.42	3,573	1,803.9
400	0.35	4,764	2,405.3




自然空冷用ヒートシンク NE型


NE199-50 (S518)

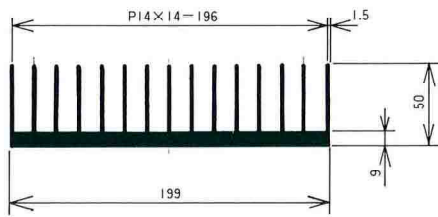


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.60	1,627	825.3
200	0.39	3,254	1,650.6
300	0.29	4,881	2,475.9
400	0.24	6,508	3,301.2




NE241-50 (S519)

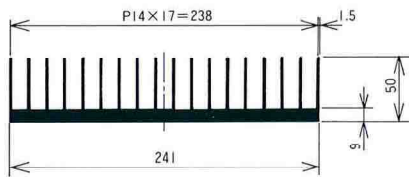


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.49	1,952	993.5
200	0.32	3,904	1,987.0
300	0.24	5,856	2,980.5
400	0.20	7,808	3,974.0




NE305-50 (S598)

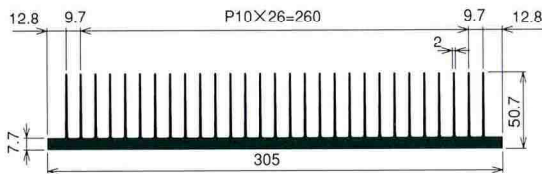


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50		1,531	611.6
100	0.74	3,062	1,223.1
200	0.52	6,124	2,446.2
300		9,186	3,669.3
400		12,248	4,892.4




NE310-50 (S520)

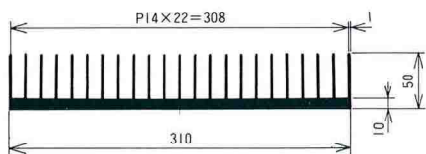


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.37	2,419	1,454.8
200	0.25	4,838	2,909.6
300	0.19	7,257	4,364.4
400	0.17	9,676	5,819.2




NE57-55 (S230)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.7	345	207.0
80	2.0	276	311.1
100	1.7	689	413.9
150	1.3	1,034	620.9
200	1.1	1,378	827.8




NE41-60 (S254)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.8	282	149.5
80	2.1	450	239.2
100	1.8	563	299.0
150	1.4	845	448.5
200	1.1	1,126	598.0




NE60-60 (S247)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.9	387	219.1
80	1.3	619	345.6
100	1.0	774	438.2
150	0.9	1,161	657.3
200	0.7	1,548	876.4




NE110-60 (S506)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	1.10	944	813.2
200	0.63	1,888	1,626.4
300	0.49	2,832	2,439.6
400	0.40	3,776	3,252.8




NE140-60 (S507)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.78	1,179	1,050.3
200	0.51	2,358	2,100.6
300	0.39	3,537	3,150.9
400	0.34	4,716	4,201.2




NE230-60 (S510)

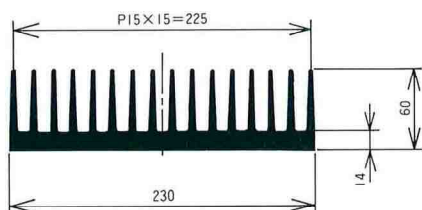


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.45	1,877	1,664.0
200	0.29	3,754	3,328.0
300	0.22	5,631	4,992.0
400	0.18	7,508	6,656.0




NE262-60 (S532)

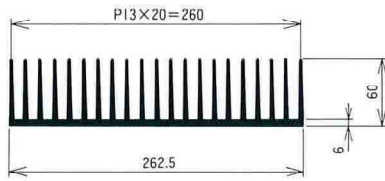


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	0.79	1,395	556.3
100	0.51	2,759	1,112.6
200	0.31	5,518	2,225.2
300	0.24	8,277	3,337.8
400	0.19	11,036	4,450.4

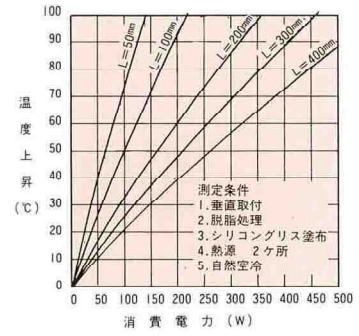


NE111-82 (S538)



L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.91	2,024	742.0
200	0.76	4,048	1,484.0
300	0.47	6,072	2,226.0

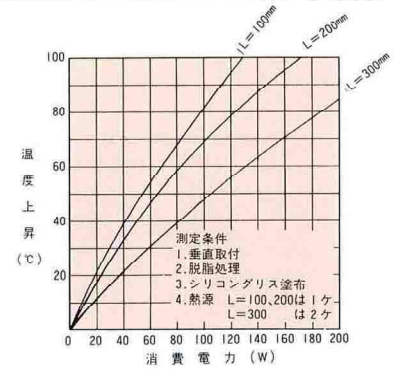


NE294-90 (S540)

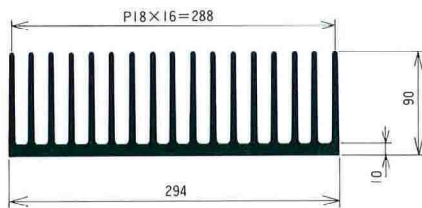


(ローレット付)

L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
100	0.48	3,416	2,446.0
200	0.27	6,832	4,892.0
300	0.23	10,248	7,338.0

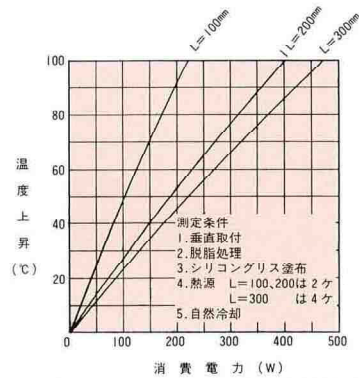

NE120-50 (S604)

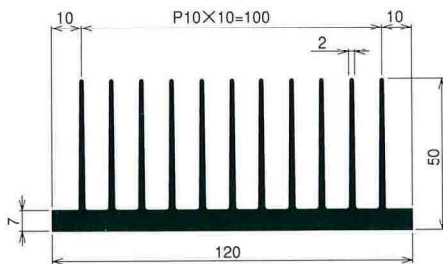

L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50		589	215.6
80	3.82	942	345.0
100	3.21	1177	431.2
150		1766	646.8
200	2.07	2345	862.4

