



自然空冷用ヒートシンク


NE型、NF型、NH型、NU型、NS型

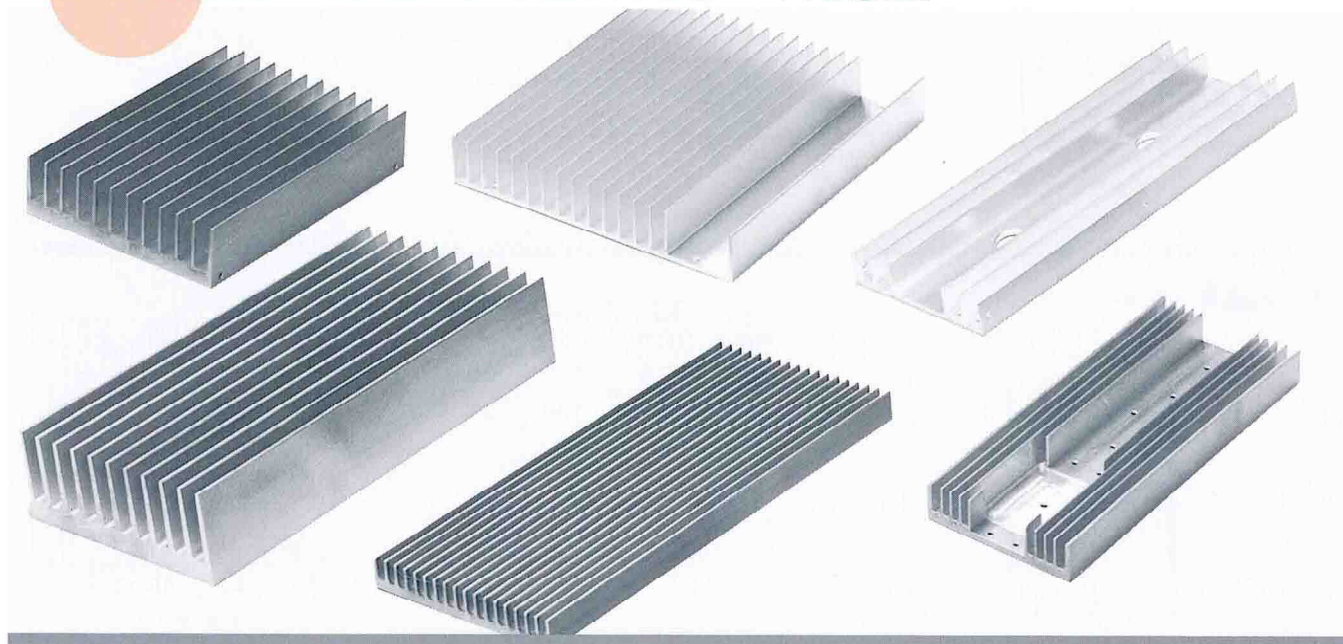


NE31-8 (S161)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
30	20.0	49	13.7
50	15.2	70	19.6
70	12.2	98	27.4
100	10.2	140	39.2




NE41-8 (S331)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	13.51	96	29.9
80	10.53	154	47.8

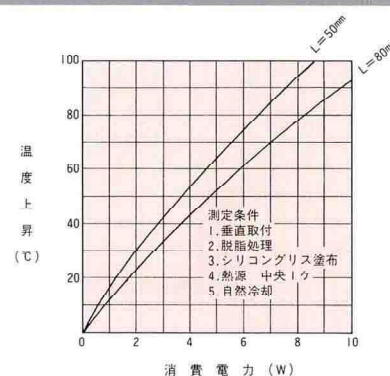

NE101-8 (S330)

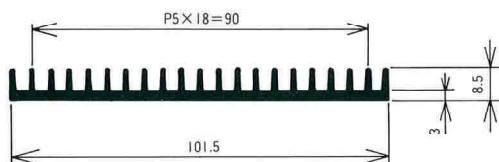


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	6.94	212	61.7
80	5.15	339	98.7
100	4.63	424	123.4

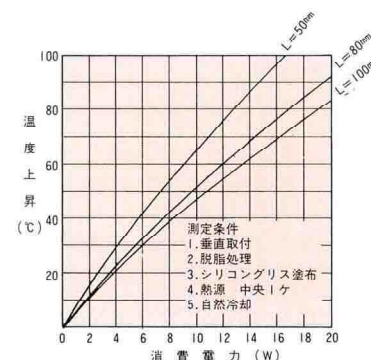


自然空冷用ヒートシンク NE型


NE152-10 (S765)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	4.4	229	103.4
80	3.1	366	165.4
100	2.8	457	206.8
150	2.0	686	310.2
200		914	413.6




NE73-12 (S327)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	7.46	158	51.5
80	5.68	253	82.3

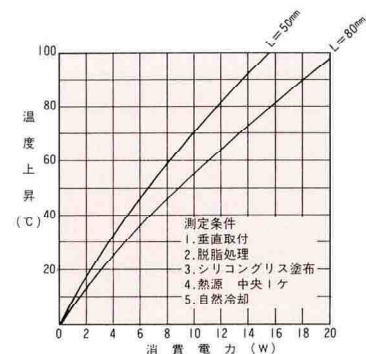


NE101-12 (S215)

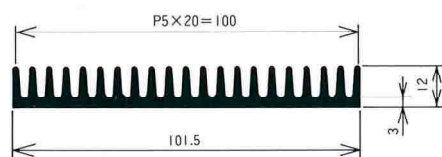


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	6.5	328	97.0
80	4.8	524	155.1
100	4.1	655	193.9
150	3.1	982	290.9
200	2.6	1,310	387.8




NE196-12 (S354)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.1	507	155.4
80	2.2	811	248.6
100	1.9	1,014	310.8
150	1.5	1,521	466.2
200	1.2	2,028	621.6




NE301-12 (S349)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.6	774	238.0
80	1.9	1,238	380.8
100	1.6	1,547	476.0
150	1.2	2,321	714.0
200	1.0	3,094	952.0




NE34-15 (S263)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	9.1	131	34.9
80	6.8	210	55.8
100	6.0	262	69.7
150	4.5	393	104.6
200	3.7	524	139.4




NE78-17 (S339)

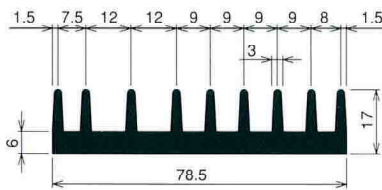

L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	5.3	176	95.9
80	3.9	281	153.4
100	3.5	351	191.7
150	2.7	527	287.6
200		702	383.4




NE98-17 (S285)

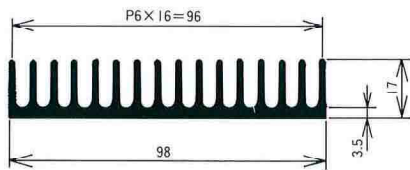


(ローレット付)

L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.9	268	100.1
80	2.2	429	160.1
100	1.9	536	200.1
150	1.4	804	300.2
200	1.2	1,072	400.2




NE155-17 (S284)

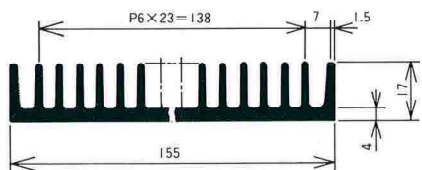


(ローレット付)

L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.6	517	156.9
80	1.7	828	251.0
100	1.5	1,035	313.8
150	1.2	1,553	470.7
200	1.0	2,070	627.6

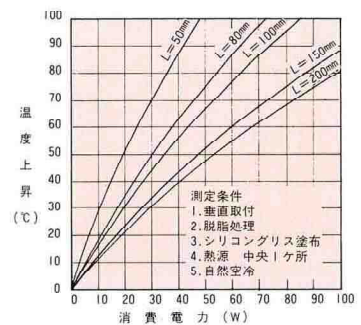


NE200-17 (S220)

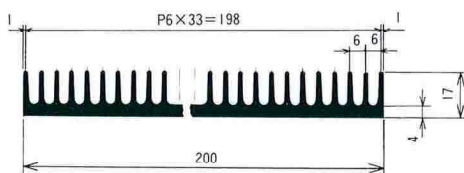


(ローレット付)

L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.1	619	211.7
80	1.6	990	338.4
100	1.4	1,238	423.3
150	1.1	1,859	635.0
200	0.9	2,476	846.6

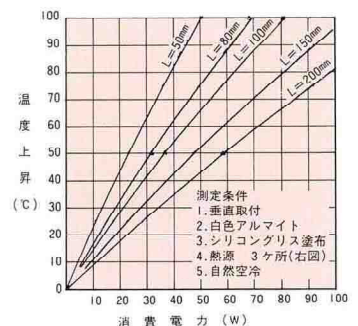


自然空冷用ヒートシンク NE型


NE43-18 (S278)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	7.1	116	63.3
80	5.3	186	101.3
100	4.7	232	126.6
150	3.6	348	189.9
200	3.0	464	253.2




NE81-18 (S214)

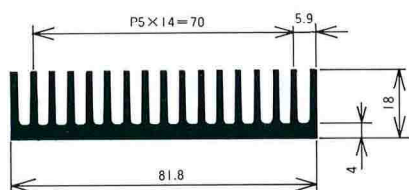


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.7	312	94.0
80	2.8	499	150.4
100	2.4	624	188.0
150	1.8	936	282.0
200	1.5	1,248	376.0




NE49-20 (S325)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	6.9	165	49.2
80	5.4	264	78.6




NE74-20 (S261)

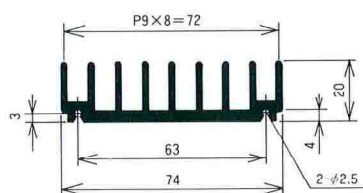


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.9	201	76.2
80	2.9	322	121.8
100	2.5	402	152.3
150	2.0	603	228.5
200	1.6	804	304.6

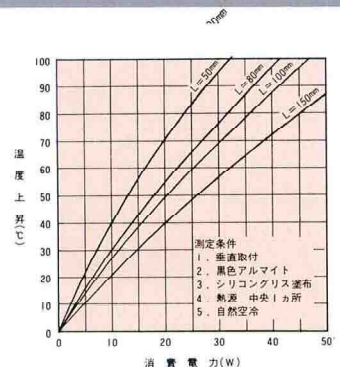

NE42-21 (S293)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	7.7	139	56.6
80	5.9	222	90.5
100	5.1	278	113.1
150	3.9	417	169.7
200	3.5	556	226.2




自然空冷用ヒートシンク NE型


NE43-21 (S260)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	6.5	133	70.8
80	4.8	213	113.2
100	4.1	266	141.5
150	3.1	399	212.3
200	2.6	532	283.0




NE50-21 (S294)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	5.9	163	67.9
80	4.5	260	108.6
100	4.1	325	135.8
150		488	203.7
200		650	271.6




NE51-21 (S236)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	5.2	156	77.5
80	4.0	249	124.0
100	3.4	311	155.0
150	2.6	467	232.5
200	2.1	622	310.0




NE75-21 (S237)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.6	225	121.8
80	2.6	359	194.8
100	2.3	449	243.5
150	1.7	674	365.3
200	1.4	898	487.0



NE106-21 (S238)

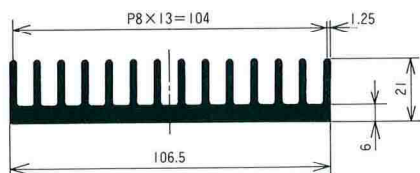


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.5	310	156.8
80	1.8	495	250.8
100	1.6	619	313.5
150	1.2	929	470.3
200	1.0	1238	627.0




自然空冷用ヒートシンク NE型


NE130-21 (S239)

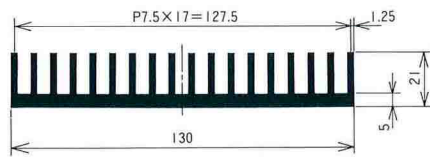


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.0	423	185.0
80	1.5	677	295.9
100	1.3	846	369.9
150	1.0	1,269	554.9
200	0.8	1,692	739.8




NE154-21 (S241)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.8	442	225.7
80	1.3	776	361.1
100	1.1	883	451.4
150	0.9	1,326	677.1
200	0.7	1,766	902.8




NE210-21 (S500)

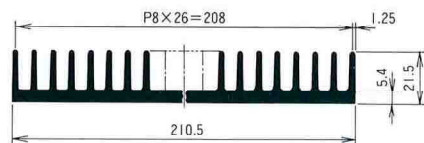


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.3	622	284.5
100	0.8	1,243	569.0
200	0.5	2,486	1,138.0




NE86-22 (S341)

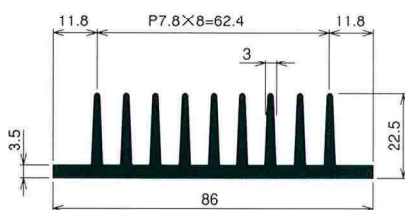


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	5.0	262	85.5
80	4.0	419	136.7
100	3.0	524	170.9
150		786	256.4
200	2.0	1,048	341.8




NE177-24 (S594)

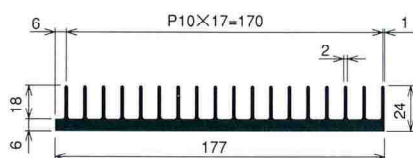


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.17	492	230.9
100	1.45	984	461.7
200	1.07	1,968	923.4
300		2,952	1,385.1
400		3,936	1,846.8




NE51-25 (S550)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	6.3	192	69.7
100	3.9	383	139.3
200	2.5	766	278.6
300		1,149	417.9
400		1,532	557.2




NE76-28 (S344)

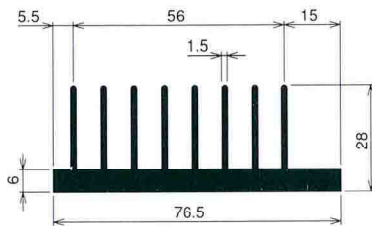


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	4.6	258	93.2
80	3.7	412	149.0
100	3.2	515	186.3
150		773	279.5
200	1.9	1,030	372.6




NE58-30 (S248)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.6	263	83.7
80	2.8	421	133.9
100	2.7	526	167.4
150	1.9	789	251.1
200	1.5	1,052	334.8




NE138-30 (S264A)

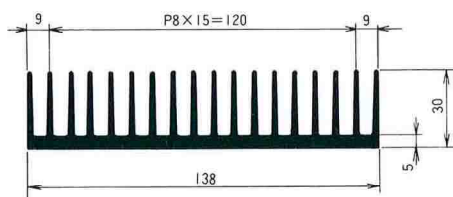


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.0	579	198.6
80	1.8	926	317.8
100	1.5	1,158	397.2
150	1.3	1,737	595.8
200	1.0	2,316	794.4




NE298-30 (S585)

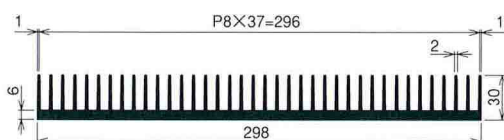


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50		1,195	454.7
100	0.71	2,389	909.4
200	0.51	4,778	1,818.8
300		7,167	2,728.2
400		9,556	3,637.6




NE183-32 (S504B)

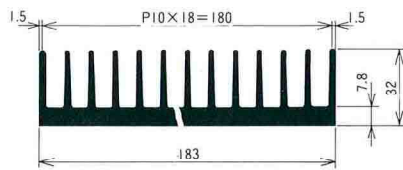


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.30	630	347.7
100	0.85	1,259	695.3
200	0.55	2,518	1,390.6




NE73-33 (S277)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.1	332	126.0
80	2.4	530	201.5
100	2.1	663	251.9
150	1.6	995	377.9
200	1.3	1,260	503.8

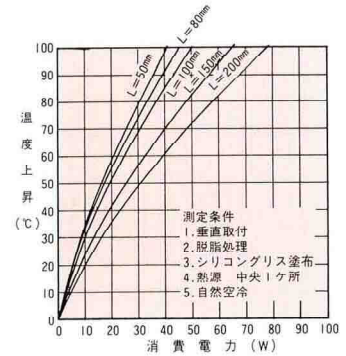


NE112-33 (S276)

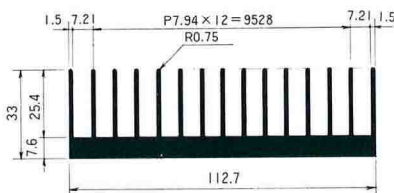


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	2.4	497	192.3
80	1.6	794	307.6
100	1.5	993	384.5
150	1.0	1,490	576.8
200	0.9	1,986	769.0

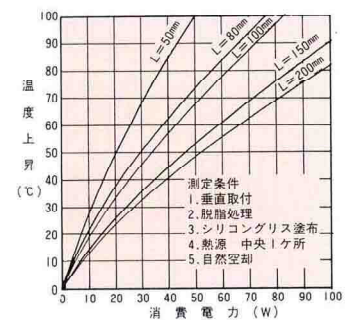


NE152-33 (S272)

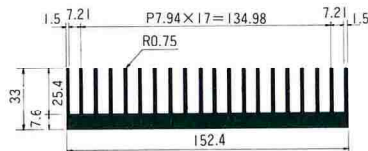

L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.9	662	258.6
80	1.5	1,058	413.8
100	1.2	1,323	517.2
150	0.9	1,985	775.8
200	0.8	2,646	1,034.4

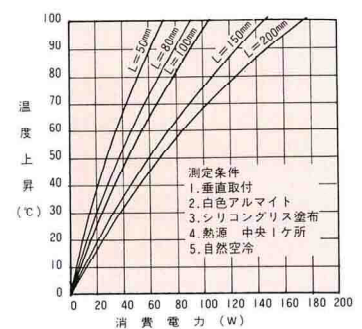

NE170-33 (S530)

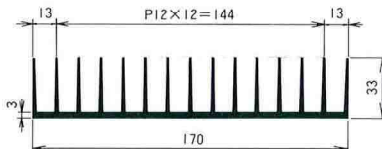

L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.79	611	153.5
100	1.14	1,221	307.0
200	0.72	2,442	614.0
300	0.57	3,662	921.0
400	0.45	4,884	1,228.0

