



自然空冷用ヒートシンク NF型


NF179-9 (S720)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm²)	重量 (g)
50	4.55	267	91.4
100	2.94	534	182.8
200	1.79	1,068	365.6

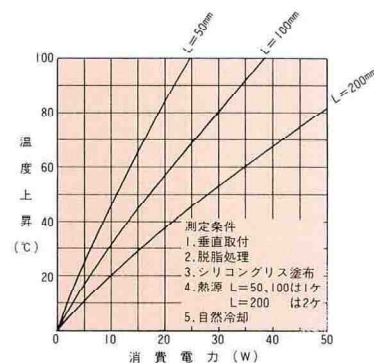


NF36-21 (S184)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm²)	重量 (g)
35	11.4	71	34.4
50	9.3	101	49.2
70	7.8	141	68.8
100	6.3	202	98.3




NF40-21 (S149)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm²)	重量 (g)
30	12.8	59	31.4
50	9.6	98	52.3

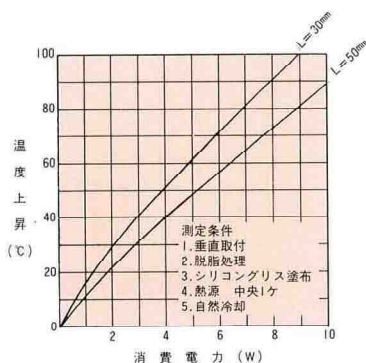


NF28-30 (S167)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm²)	重量 (g)
35	11.9	74	27.3
50	9.6	106	39.0
70	8.1	148	54.6
100	6.4	212	78.0




NF78-35 (S342)

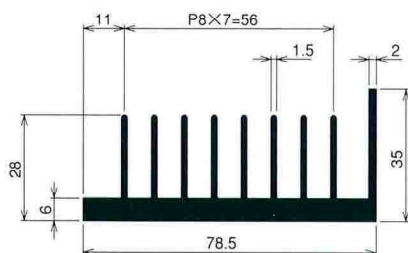


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm²)	重量 (g)
50	4.2	298	102.6
80	3.0	477	164.2
100	2.5	596	205.2
150		894	307.8
200	1.5	1,192	410.4




NF52-26 (S181)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
35	10.0	81	39.0
50	8.6	116	55.8
70	6.9	162	78.1
100	5.7	232	111.5




NF33-66 (S776)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	5.8	207	93.7
80	4.2	331	149.9
100	3.4	414	187.4
150		621	281.1
200	2.0	828	374.8




NF44-67 (S279)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	4.2	231	94.8
80	2.9	369	151.7
100	2.4	461	189.6
150	1.8	692	284.4
200	1.7	922	379.2




NF54-67 (S280)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	3.9	264	107.6
80	2.8	422	172.2
100	2.1	528	215.2
150	1.9	792	322.8
200	1.5	1,056	430.4

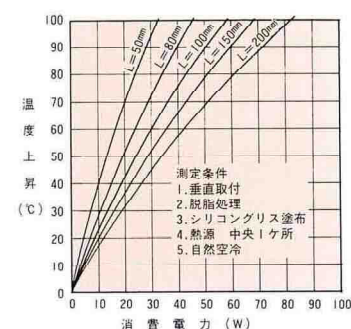


NH130-32 (S216)

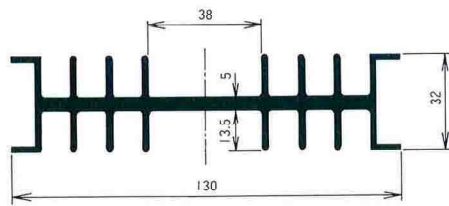


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重 量 (g)
50	2.4	356	144.1
80	1.8	570	230.5
100	1.5	712	288.1
150	1.2	1,068	432.2
200	0.9	1,424	576.2



NH102-33 (S228)

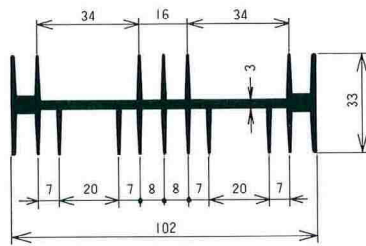


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重 量 (g)
50	3.2	360	103.6
80	2.3	575	165.7
100	2.1	719	207.1
150	1.6	1,079	310.7
200	1.3	1,438	414.2




自然空冷用ヒートシンク NU型


NU46-13 (S213B)

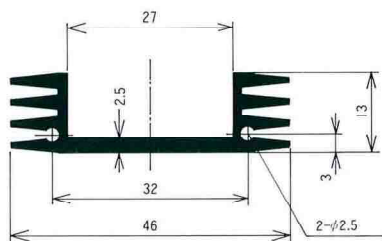


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重 量 (g)
50	8.0	113	28.9
80	5.8	181	46.2
100	5.0	226	57.8
150	3.8	339	86.7
200	3.1	452	115.6




NU52-19 (S234)

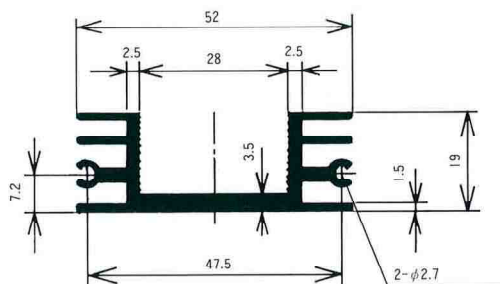


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重 量 (g)
50	6.4	155	44.3
80	4.7	248	70.9
100	3.8	310	88.6
150	2.9	465	132.9
200	2.4	620	177.2




NU65-20 (S269)

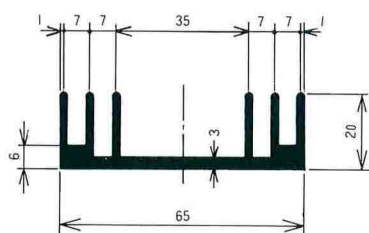


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重 量 (g)
50	5.4	161	57.7
80	4.0	257	92.2
100	3.4	321	115.3
150	2.6	482	173.0
200	2.2	642	230.6




NU84-21 (S244)

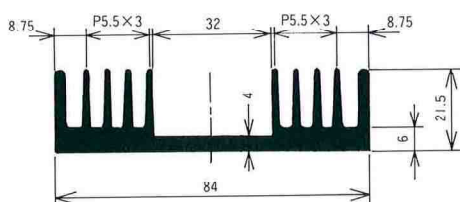


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重 量 (g)
50	3.7	236	94.1
80	2.8	378	150.6
100	2.4	472	188.2
150	1.8	708	282.3
200	1.5	944	376.4



NU78-27 (S255)

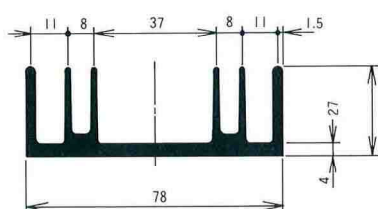


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重 量 (g)
50	3.6	214	85.9
80	2.6	342	137.4
100	2.2	428	171.7
150	1.7	642	257.6
200	1.4	856	343.4




自然空冷用ヒートシンク NU型

NU162-30 (S226)

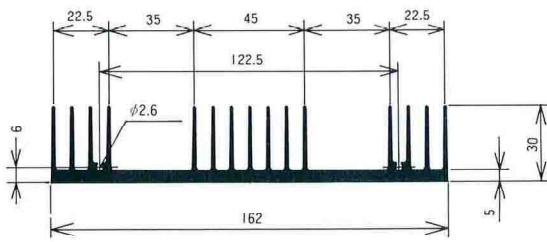


L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.9	528	200.5
80	1.3	844	320.8
100	1.1	1,055	401.0
150	0.9	1,583	601.5
200	0.7	2,110	802.0




自然空冷用ヒートシンク NS型


NS45-31 (S803)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	5.37	173	84.1
80	3.95	276	134.6
100	3.64	345	168.2
150		518	252.3
200		690	336.4




NS62-32 (S534)




L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	5.88	163	56.9
100	3.75	325	113.7
200	2.37	650	227.4
300	1.80	975	341.1
400	1.48	1,300	454.8




NS81-45 (S528)



L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	4.55	254	103.5
100	2.90	508	206.9
200	1.85	1,016	413.8
300	1.40	1,524	620.7
400	1.18	2,032	827.6



NS270-43 (S527)

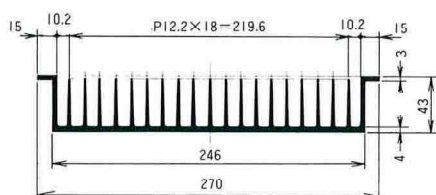

L寸法 (mm)	熱抵抗 (°C/W)	表面積 (cm ²)	重量 (g)
50	1.04	1,035	317.2
100	0.67	2,069	634.4
200	0.42	4,138	1,268.8
300	0.31	6,207	1,903.2
400	0.27	8,276	2,537.6

